

LAYOUT OF THE LABEL

THE LAYOUT OF THE LABEL HAS TO CORRESPOND WITH THE TEMPLATE BELOW:

- The label must be at least 60 mm wide and 120 mm high. If a label is printed in a larger format, the proportions mentioned in the foregoing specification must be adhered to.
Please note: The graphical elements must be scaled up proportionately!

- The background must be white.


Colour design

CMYK – as shown below:

00-70-X-00 = 0% cyan, 70% magenta, 100% yellow, 0% black

- The label has to comply with the following requirements:

- A Border line**
3 pt — rounded corners 2 mm — X-00-00-00
- B CH logo**
8 mm wide, 8 mm high — rounded corners 2 mm — 00-X-X-00
- C Energy logo**
Frutiger LT Std Black Condensed — 19/22 pt and Frutiger LT Std Black Condensed — 10/12 pt — 00-00-00-00 — area: 47 mm wide, 8 mm high — X-00-00-00
- D Name and manufacturer's brand I + II**
Frutiger LT Std Black Condensed — 7,5/8,5 pt — 00-00-00-X and Frutiger LT Std Light Condensed, 7,5/8,5 pt — upper case letters — 00-00-00-X
- E Dividing line under label header**
1,5 pt — 56 mm wide — X-00-00-00

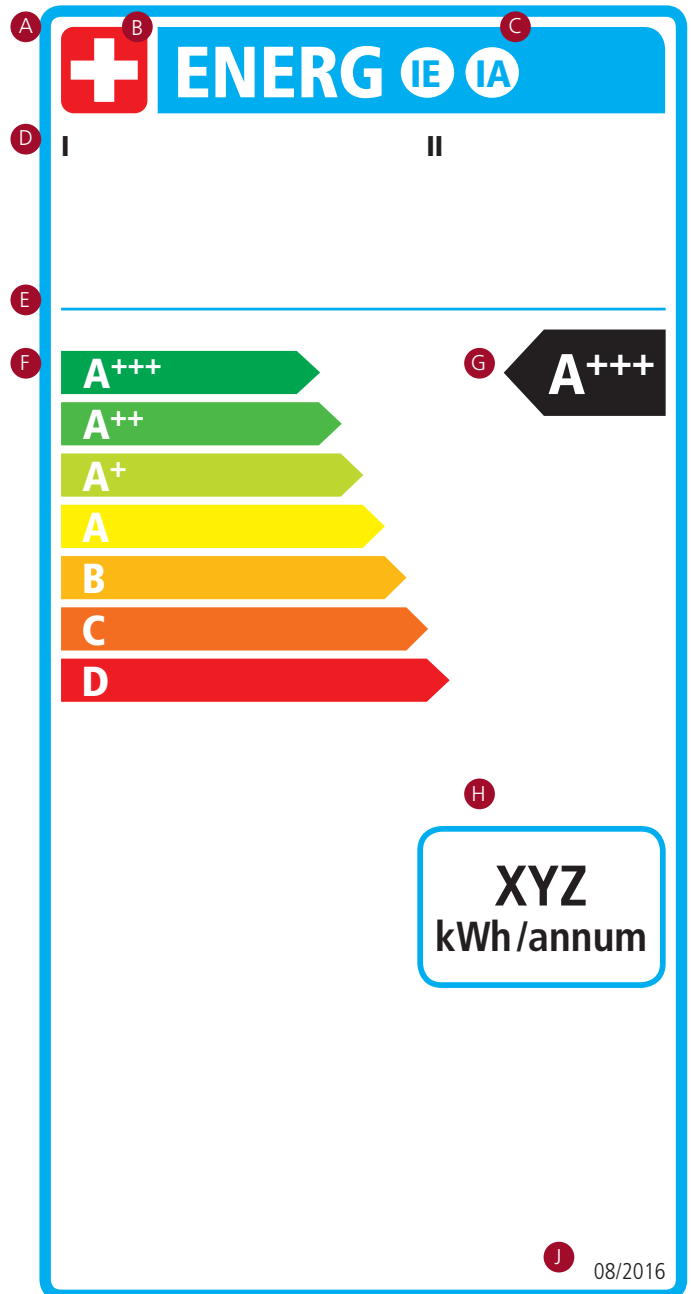

LAYOUT OF THE LABEL

THE LAYOUT OF THE LABEL HAS TO CORRESPOND WITH THE TEMPLATE BELOW:

F Scale of energy efficiency classes

Arrow: Width of shortest arrow 26 mm, gap between next arrow always 2 mm, 4 mm high — spaces: 0,75 mm — colours:

Highest efficiency class X-00-X-00

Second efficiency class 70-00-X-00

Third efficiency class 30-00-X-00

Fourth efficiency class 00-00-X-00

Fifth efficiency class 00-30-X-00

Sixth efficiency class 00-70-X-00

Lowest efficiency class 00-X-X-00

— Frutiger LT Std Black Condensed — 11 pt —

upper case letters — 00-00-00-00 — «+» Symbol

superscript — size 70%, position 33,3%

G Energy efficiency class

Arrow: 15 mm wide, 8 mm high, 00-00-00-X — Frutiger

LT Std Black Condensed — 15 pt — upper case letters —

00-00-00-00 — «+» Symbol superscript — size 70%,

position 33,3%

H Annual energy consumption

1,5 pt — X-00-00-00 — rounded corners: 2 mm — Frutiger LT

Std Black Condensed — 15/12 pt — 00-00-00-X and Frutiger

LT Std Black Condensed — 11/12 pt — 00-00-00-X

J Norm

Frutiger LT Std light — 6/7 pt — 00-00-00-X

